



Flexi Pig type FLEX-S2

For the emptying of pipes. In addition, for the removal of sand, mud or condensate.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.3
3"	185	125	0.5
4"	210	155	0.7
6"	325	220	2.6
8"	395	290	4.4
10"	490	370	8.6
12"	555	440	10.5
14"	620	490	16.0
16"	690	560	20.0
18"	810	645	35.0
20"	870	705	40.0
22"	920	745	48.0
24"	1035	875	59.0



Flexi Pig type FLEX-S3

For hydrostatic testing, the separation of liquids and emptying of the pipes. In addition, for the removal of sand, mud or condensate.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.35
3"	185	125	0.55
4"	210	155	0.80
6"	325	220	3.00
8"	395	290	5.00
10"	490	370	9.20
12"	555	440	12.80
14"	620	490	19.80
16"	690	560	25.60
18"	810	645	41.00
20"	870	705	48.00
22"	920	745	58.00
24"	1035	875	70.00



Flexi Pig type FLEX-S4

For hydrostatic testing, the separation of liquids and emptying of the pipes. In addition, for the removal of sand, mud or condensate.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.40
3"	185	125	0.60
4"	210	155	1.00
6"	325	220	3.40
8"	395	290	6.00
10"	490	370	11.00
12"	555	440	15.40
14"	620	490	23.00
16"	690	560	31.50
18"	810	645	48.00
20"	870	705	58.00
22"	920	745	60.00
24"	1035	875	85.00




Flexi Pig type FLEX-G2

For the calibration of pipes.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.40
3"	185	125	0.60
4"	210	155	0.80
6"	325	220	3.00
8"	395	290	5.00
10"	490	370	9.00
12"	555	440	12.00
14"	620	490	18.00
16"	690	560	25.00
18"	810	645	40.00
20"	870	705	45.00
22"	920	745	55.00
24"	1035	875	65.00

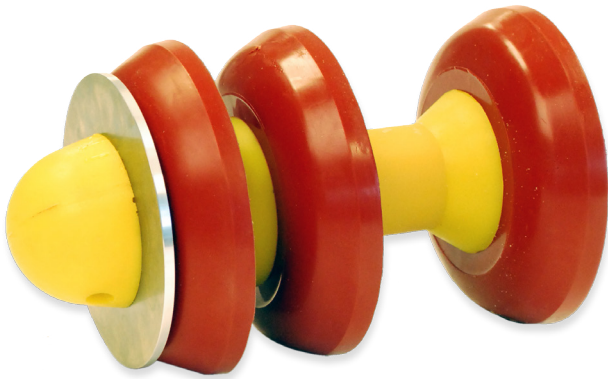

Flexi Pig type FLEX-G3

For the calibration of pipes.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.45
3"	185	125	0.65
4"	210	155	1.00
6"	325	220	3.40
8"	395	290	6.00
10"	490	370	11.00
12"	555	440	15.00
14"	620	490	23.00
16"	690	560	31.00
18"	810	645	47.00
20"	870	705	55.00
22"	920	745	60.00
24"	1035	875	80.00



Flexi Pig type FLEX-G4

For the calibration of pipes.

Dimensions and weight

Size	Total length (mm)	Distance between front and rear cup (mm)	Weight (kg)
2"	130	100	0.50
3"	185	125	0.75
4"	210	155	1.50
6"	325	220	4.00
8"	395	290	7.00
10"	490	370	12.00
12"	555	440	16.50
14"	620	490	25.00
16"	690	560	33.00
18"	810	645	50.00
20"	870	705	63.00
22"	920	745	65.00
24"	1035	875	90.00