





Pipe Pig Detection Equipment For Detecting Pipe Pig


Using this low-frequency electromagnetic transmitters, it is possible to detect pipe pigs with an accuracy of half a meter. For detecting is need a transmitter in the pipe pig and a special receiver to defect the channel.

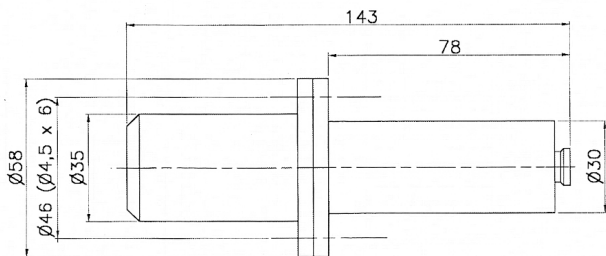


Type ORT-S1-F080 Tevens leverbaar zonder flens

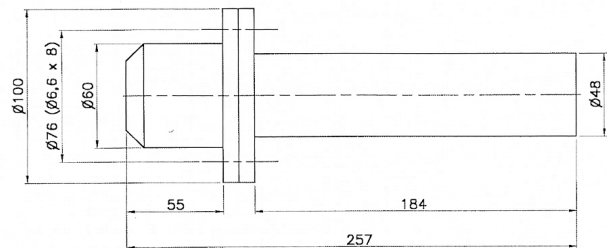

Type ORT-S2-F180

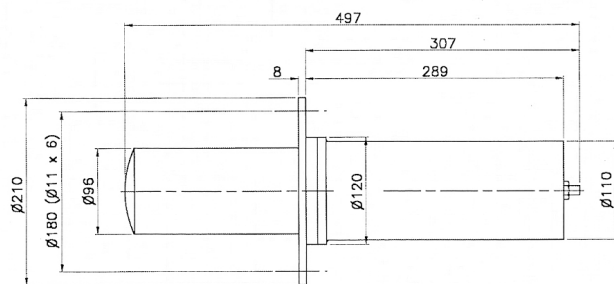

Type ORT-S3-F260

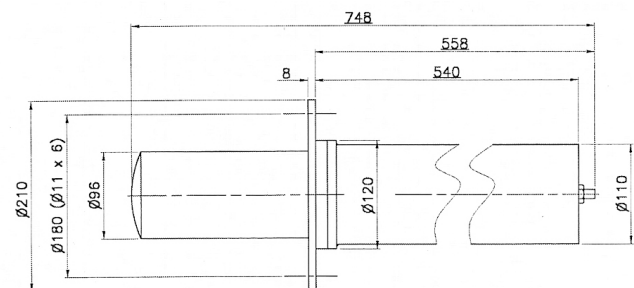

Type ORT-S4-F500

Specificaties:	Pipe Diameter	Working Time (Hours)	Weight (Kg)
Type	Leidingdiameter	Werkduur (uur)	Gewicht (kg)
ORT-S1-F080	3"-6"	80	1
ORT-S2-F180	8"-18"	180	2,5
ORT-S3-F260	20"-64"	260	10
ORT-S4-F500	20"-64"	500	14

Specificaties van pipe pig ontvanger type ORT-D3	
Temperatuurbereik (°C)	-15 tot +70
Signaalbereik (m) Signal Range (m)	Met ingebouwde antenne: tot 7m Met externe antenne: tot 17m
Gewicht (kg) Weight (kg)	3.3
Aansluitingen Connections	External antenna, headphones, Geophone, USB 2.0 and GSM SIM card
Veiligheidsklasse Safety Class	IP65 (in overeenstemming met de EN60529)
Accessoires	External antenna and geophone sensor